




Hudyne M5 Mounting Conditions

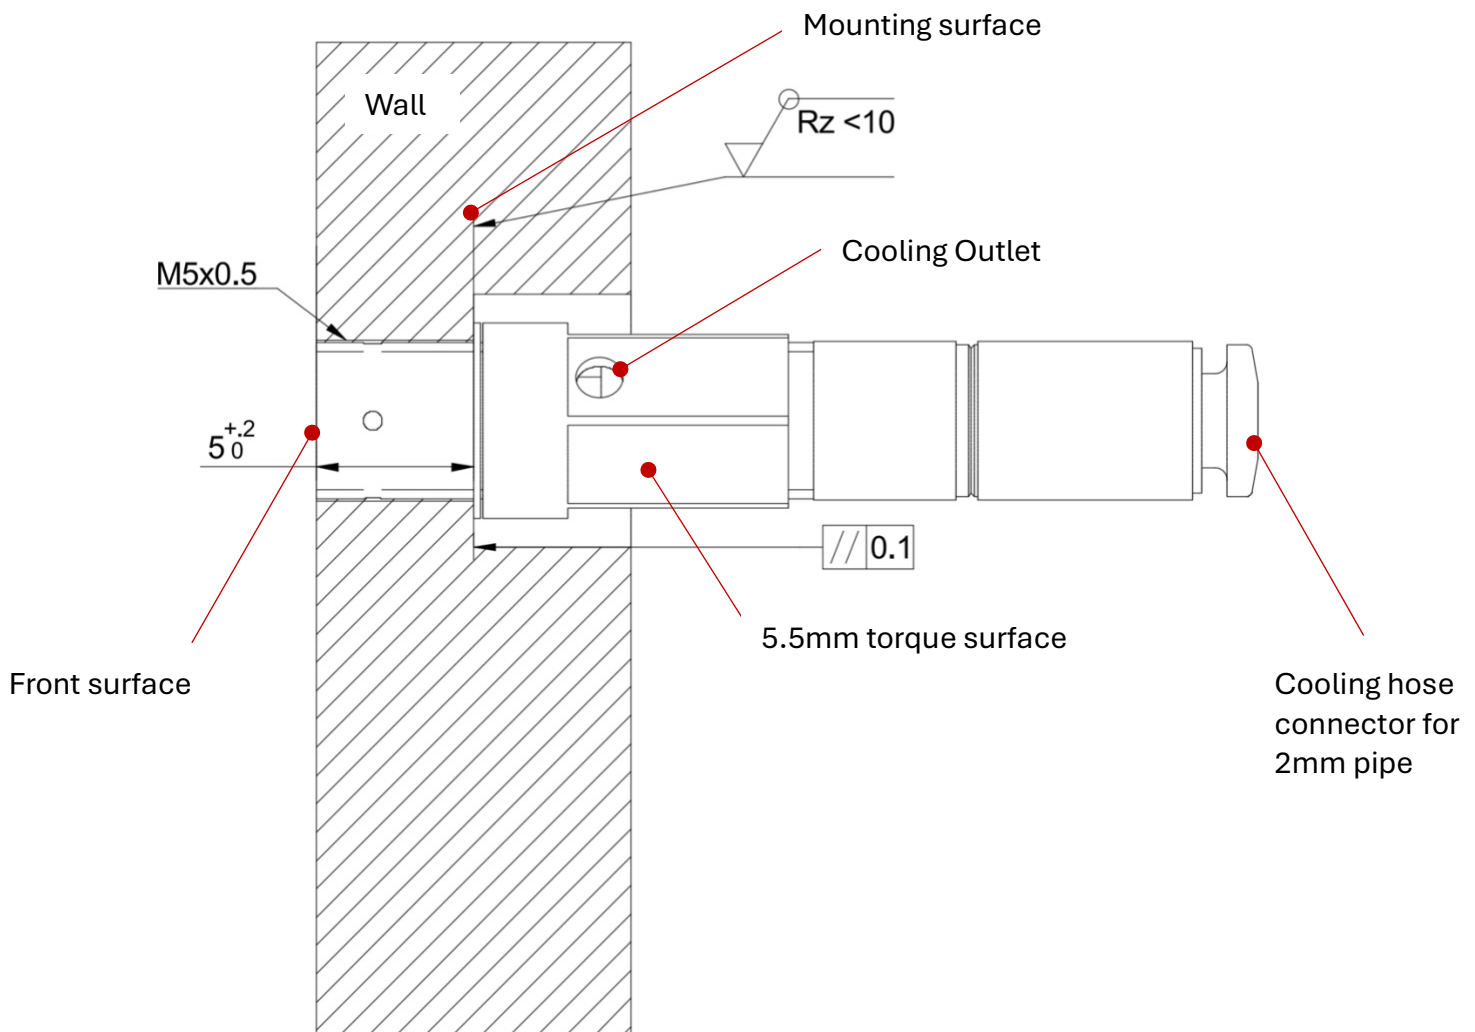

Mounting Specifications:

- Recommend tightening torque 3Nm. It depends on the wall material and the gasket used.
- The mounting surface shall be optimized for a copper gasket.


Hudyne Sensors GmbH – Your specialist for heat flux sensors and special amplifier systems
Ingolstädterstraße 27
85084 Reichertshofen
info@hudyne.com

© Hudyne Sensors GmbH - All rights reserved.

This document and its contents are the property of Hudyne GmbH and are protected under applicable copyright and intellectual property laws. Reproduction, distribution, or disclosure to third parties is prohibited without prior written consent.



Sensor geometry:

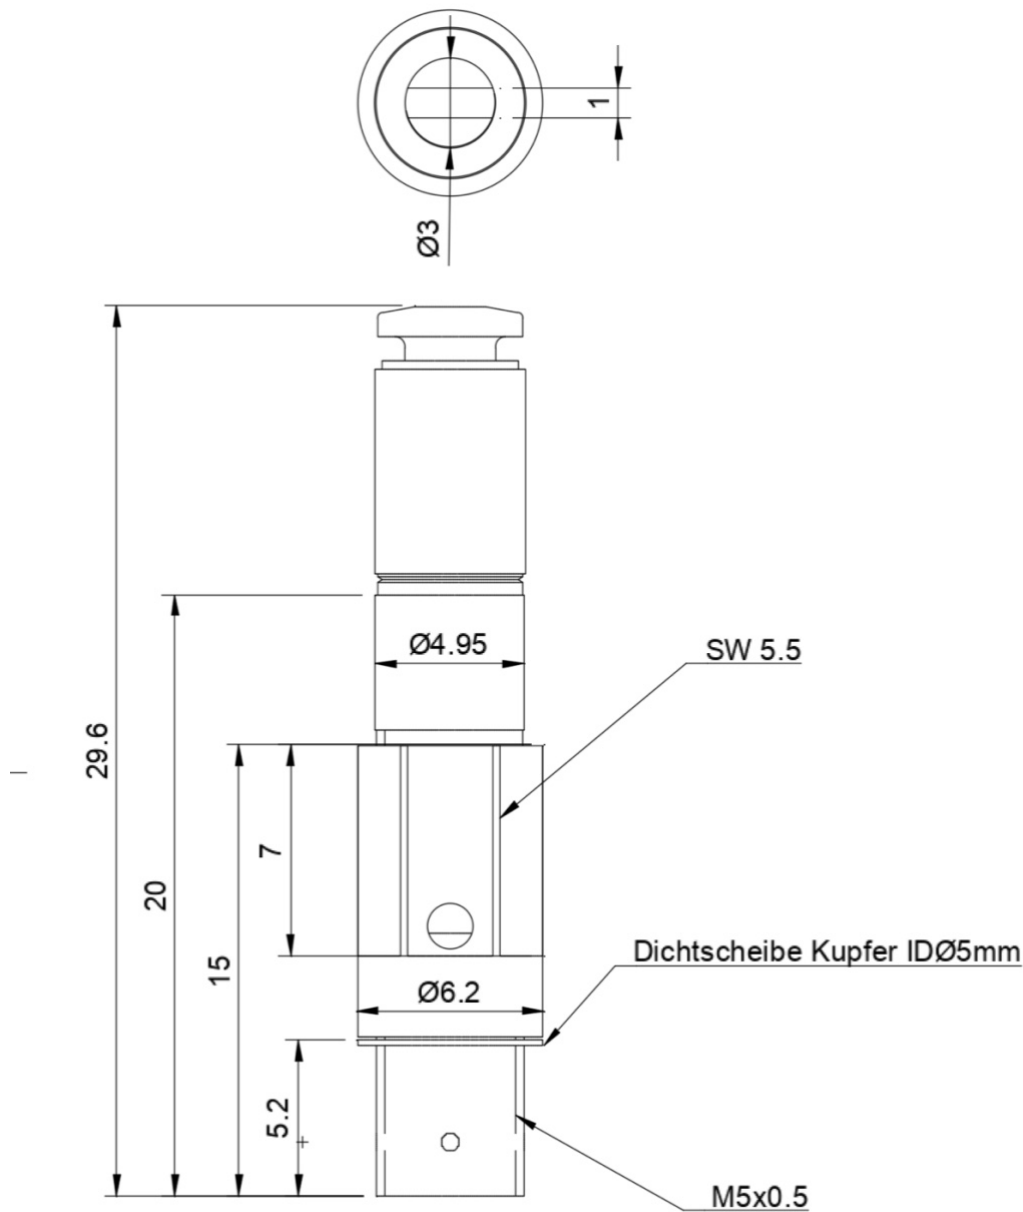

Detailed technical drawings and instruction manuals are available upon request. For more details contact info@hudyne.com.

Hudyne Sensors GmbH – Your specialist for heat flux sensors and special amplifier systems
Ingolstädterstraße 27
85084 Reichertshofen
info@hudyne.com

© Hudyne Sensors GmbH - All rights reserved.

This document and its contents are the property of Hudyne GmbH and are protected under applicable copyright and intellectual property laws. Reproduction, distribution, or disclosure to third parties is prohibited without prior written consent.